


Alstron ALT Series Ultrasonic Cleaner provides a comprehensive range of units tailored for industrial part cleaning. Applications cover degreasing and removing contaminants from various components including marine vessels, aerospace parts, PCBs, machining parts, mechanical components (pre-coating or plating), optical parts, surgical instruments, 3D modeling, R&D, and more.

- Signature Frequency 33kHz for General Cleaning Applications
- Internal Tank - Stainless Steel SS316L, External Tank - SS304 Construction
- Programmable HMI for precise control of ultrasonic duration, heating temperature, and adjustable power intensity functions
- PLL Technology with Auto-Frequency Tracking & Adjustment
- Power Input: AC 220 – 240V, Single-Phase
- Water Drainage Piping & Valve in SS316
- Castor Wheel with Brakes for Easy Transportation or SS316L Base Structure for Vessels

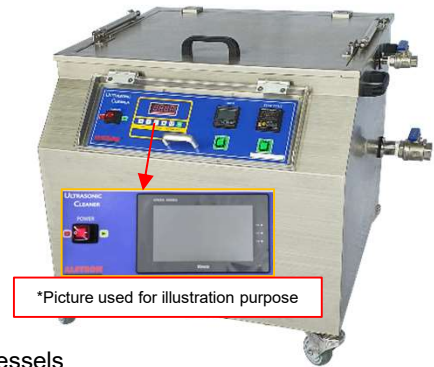

| Model | ALT-331500-90H-P |
|------------------------------------------------|----------------------------------------------------------|
| Functional | |
| Frequency (kHz) | 33 |
| Capacity (Litres) | 90 |
| Ultrasonic Power (Watts) | 1500 |
| Sweeping Function | Yes |
| Power Intensity | 10 - 100% Adjustable |
| Timer Function | 1 - 60 mins / Infinity |
| Immersion Heater Power (Watts) | 2000 |
| Temperature Sensor Type | PT100 |
| Temperature Range (Celsius) | 20 – 70 °C |
| Input Power | AC 220 – 240V, Single Phase, 50/60Hz |
| Connected Power (Ampere) | 16 |
| Programmable HMI (Touchscreen) | Graphical display & control, alarm and password security |
| Physical | |
| Internal Tank Dimension L x W x H (mm) | 600 x 500 x 300 |
| Overall External Tank Dimension w/o Valve (mm) | 772 x 592 x 640 |
| Internal Tank Material | SS316L |
| External Tank Material | SS304 |
| Net Weight (kg) | 78 |
| Water Inlet Valve | SS316, ½ Inch Full Ball Valve |
| Drainage Valve Material | SS316, 1 ¼ Inch Full Ball Valve |
| Power Cable Length | 3m with Quick Connector and 3-Pin Plug |
| Basket | |
| Basket Internal Dimension L x W x H (mm) | 570 x 470 x 230 |
| Basket Material | SS316L |
| Mesh Grid Size (mm ²) | 25 x 25 |
| Optional | |
| High Density Basket Model | ABK-331500-01 |
| Mesh Grid Size (mm ²) | 5 x 5 |